
# kardexremstar

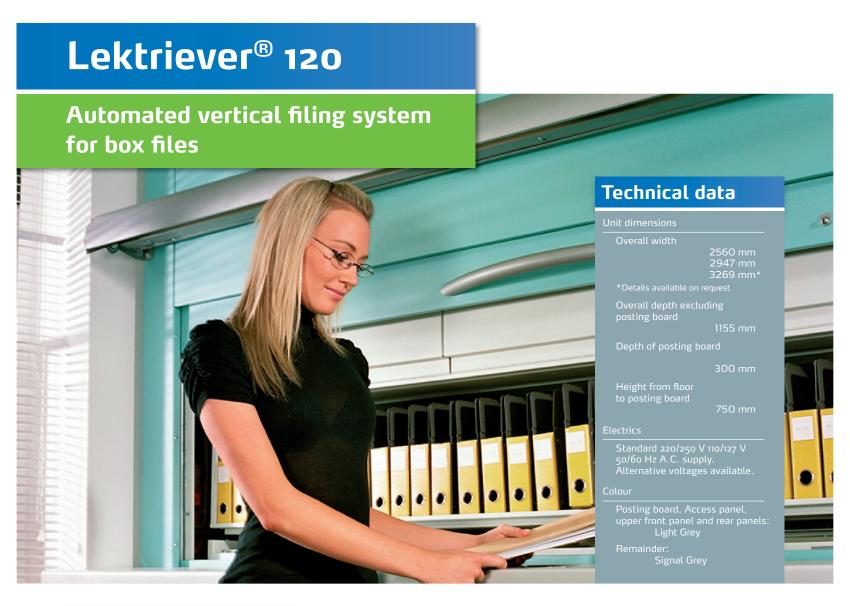

#### Benefits at a glance:

- Increase speed and efficiency
- Improve productivity
- Increase storage capacity
- Eliminate misfiling
- Improve records security
- Enhance office environment

Supplied complete with fixed posting board, carrier selection panel, electronic safety photocells and mechanical safety devices, by-pass switch and lockable sliding door as standard. A front light-box over the working area is available as an optional extra.

Lektrievers are provided with a front access panel protected by a microswitch for the retrieval of items accidentally dropped into the conveyor compartment. Kardex Lektrievers can be installed side by side or back to back, as all routine maintenance can be performed from the front of the machine.

Should power fail, the unit can be operated by a handle, so that contents can

still be obtained. When power is restored a safety cut-out stops automatic movement until the handle is removed.



## **kardex** remstar

### Lektriever 120 for box files:





Cat. No.	No. of Carriers	Average Access Time Seconds	Machine Height mm	Minimum Room Height mm	Weight Unloaded kg		Filing Capacity cm	
					Unit Width 2560 mm	Unit Width 2947 mm	Unit Width 2560 mm	Unit Width 2947 mm
For box files. Max. box file depth 300 mm. Max. box file height 350 mm								
0915	9	4.8	2350	2370	937	1030	1980	2328
1015	10	5-3	2550	2570	1000	1100	2200	2587
1115	11	5.8	2750	2770	1062	1169	2420	2846
1215	12	6.4	2950	2970	1125	1239	2640	3104
1315	13	6.9	3150	3170	1188	1308	2860	3363
1415	14	7-4	3300	3320	1244	1370	3080	3622
1515	15	8.0	3500	3520	1307	1440	3300	3881
1615	16	8.5	3700	3720	1370	1510	3520	4139



#### Kardex Systems Ltd

P.O. Box 53133 3300 Limassol Cyprus

Tel +357 25 875600 Fax +357 25 590091

info.remstar.cy@kardex.com